


SipXbridge and Interoperating with High Availability ITSP Nodes

This document describes the issues and workaround of connecting to a high availability ITSP node using the SipXcom SipXbridge pseudo-SBC capabilities. The high-availability ITSP node configuration provided by Ace Innovative will be used to describe the situation - the network configuration is as follows:

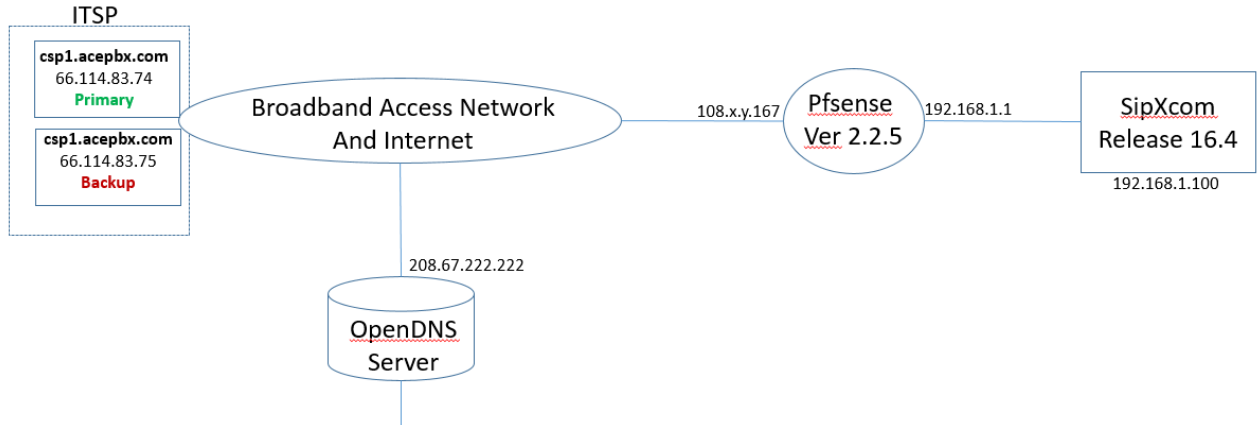

```
[root@pbx ~]# host -t NAPTR csp1.acepbx.com
csp1.acepbx.com has NAPTR record 100 100 "s" "SIP+D2U" "" _sip._udp.srv.csp1.acepbx.com.
[root@pbx ~]# host -t SRV _sip._udp.srv.csp1.acepbx.com
_sip._udp.srv.csp1.acepbx.com has SRV record 20 0 5060 csp2.acepbx.com.
_sip._udp.srv.csp1.acepbx.com has SRV record 10 0 5060 csp1.acepbx.com.
[root@pbx ~]#
```

Ace Innovative has recently introduced a high availability service and has begun migrating most of their clients to this ITSP node named [csp1.acepbx.com](#). There are actually two target nodes behind [csp1.acepbx.com](#) - [csp1.acepbx.com](#) (66.114.83.74) and [csp2.acepbx.com](#) (66.114.83.75). [csp1.acepbx.com](#) is provisioned in the address field (PSTN gateway address in the **Devices->Gateways->SIP trunk** menu) when the SIP trunk is defined. The way Ace has defined the service is that all traffic goes through the primary [csp1](#) node and the backup [csp2](#) node is used only when [csp1](#) is unavailable. In the above diagram, Ace Innovative has defined a NAPTR record for [csp1.acepbx.com](#) called [_sip._udp.srv.csp1.acepbx.com](#). That NAPTR record is then used to query the SRV records - two are returned. The target node [csp1.acepbx.com](#) is the record with the lower priority (10) and Sipxbridge should register to this node. Sipxbridge queries for the NAPTR and SRV records correctly - the issue is that Sipxbridge prior to 17.10 does not process the SRV records correctly, and registers the trunk to [csp2.acepbx.com](#) about 50 percent of the time. [sipXbridge in 17.10 and later now handles ITSP connections with SRV records.](#)

The good news is that on a busy Sipxcom system, there is no impact when the SIP trunk registers to [csp2.acepbx.com](#). Sipxbridge always sends a keep-alive UDP packet every 20 seconds to [csp1.acepbx.com](#) regardless of whether the SIP trunks registers to [csp1](#) or [csp2](#). If there are incoming PSTN calls that arrive within the 10 minute SIP trunk registration window, then the invites will continue to be delivered from the primary [csp1](#) node. The firewall state for [csp1](#) is maintained by the 20-second Sipx keep-alive packet, so the incoming call successfully traverses the firewall to the Sipxcom server.

If there are no incoming calls within the 10-minute interval when the SIP trunk is registered to [csp2](#), and the subsequent registration also registers to [csp2](#), then invites for incoming PSTN calls on the SIP trunk will be sent from [csp2](#). This presents a firewall state issue - when the SIP trunk registers to [csp2](#), firewall states are created for [csp2](#) and the 20 second keep-alive maintains the firewall states for [csp1](#). However firewall state information for [csp2](#) ages out in 60 seconds when default firewall parameters are used.

Diagnostics: Show States

States **Reset States** Firewall state immediately after SIP trunk Registers

Current total state count: 128 Filter expression: Filter **Ki**

Int	Proto	Source -> Router -> Destination	State
LAN2	udp	66.114.83.75:5060 <- 192.168.1.100:5080	MULTIPLE:MULTIPLE
WAN	udp	108.167:5080 (192.168.1.100:5080) -> 66.114.83.75:5060	MULTIPLE:MULTIPLE
LAN2	udp	66.114.83.74:5060 <- 192.168.1.100:5080	MULTIPLE:MULTIPLE
WAN	udp	108.167:5080 (192.168.1.100:5080) -> 66.114.83.74:5060	MULTIPLE:MULTIPLE

States matching current filter: 4

Diagnostics: Show States

States **Reset States** Firewall state 60 seconds after SIP trunk Registers

Current total state count: 101 Filter expression: Filter **Ki**

Int	Proto	Source -> Router -> Destination	State
LAN2	udp	66.114.83.74:5060 <- 192.168.1.100:5080	MULTIPLE:MULTIPLE
WAN	udp	108.167:5080 (192.168.1.100:5080) -> 66.114.83.74:5060	MULTIPLE:MULTIPLE

States matching current filter: 2

The workaround is to replace the csp1.acepbx.com address in the SIP trunk definition with the actual IP address (64.114.83.74) in the Sipxcom gateway configuration definition - this forces all registrations to **csp1** but bypasses the high availability capability.